


HYDRAULIC GEAR PUMP

KH-01-02 SERIES

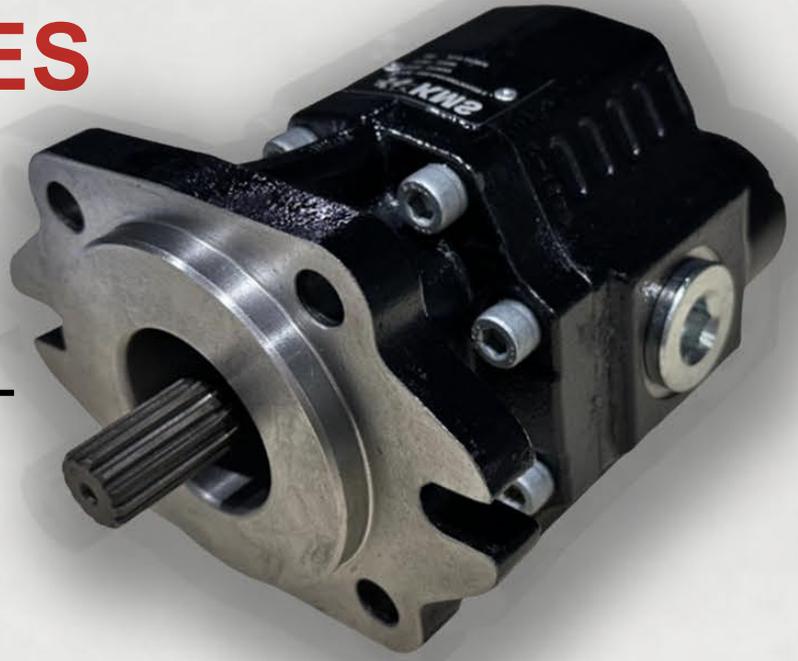


2+4 HOLES


SAE B 13 T BI-DIRECTIONAL

4 PORT GEAR PUMP



KH-01-02 SERIES GEAR PUMP CODE DESIGNATOR & SPECIFICATIONS

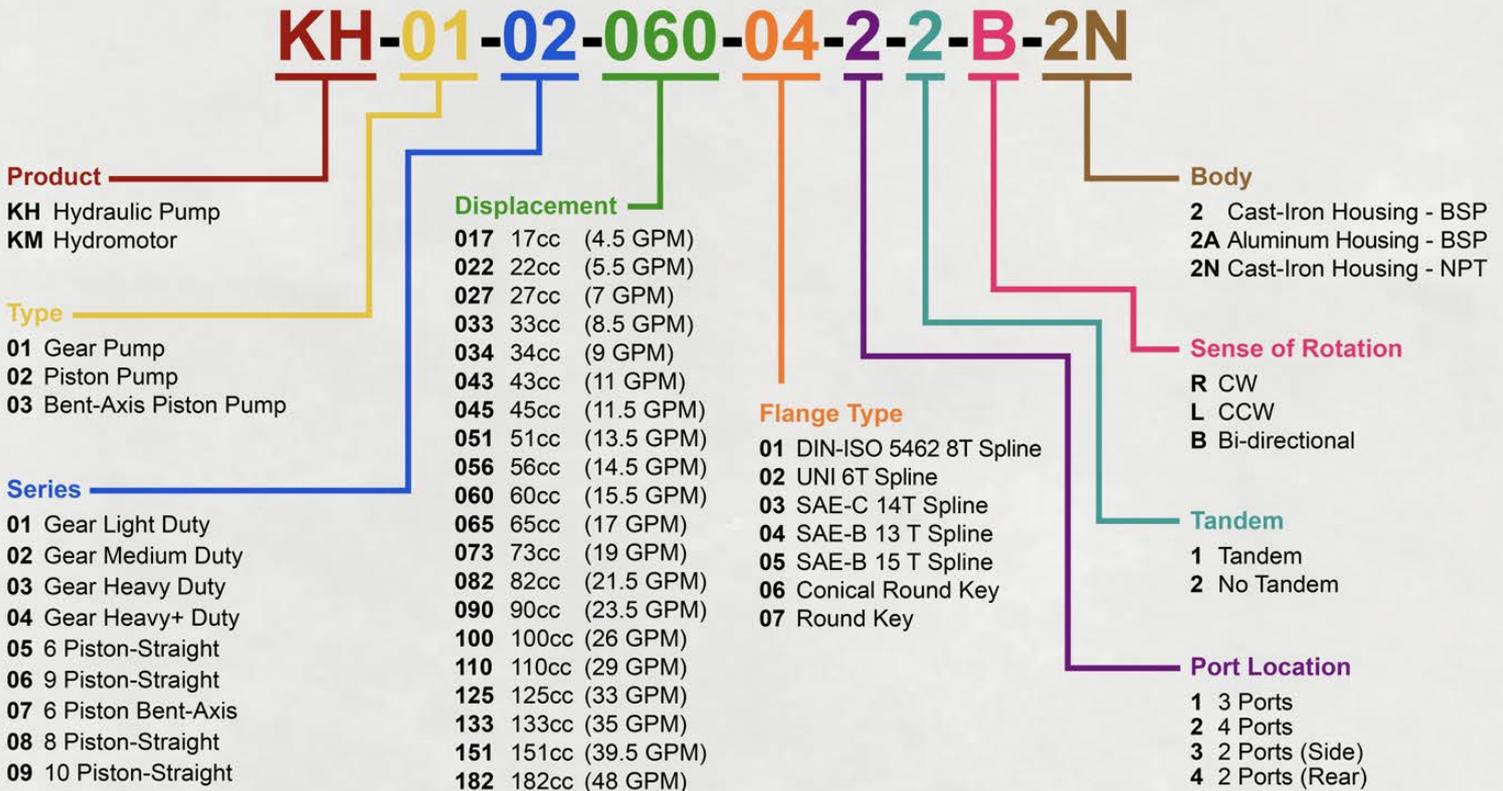

9 GPM Hydraulic Gear Pump

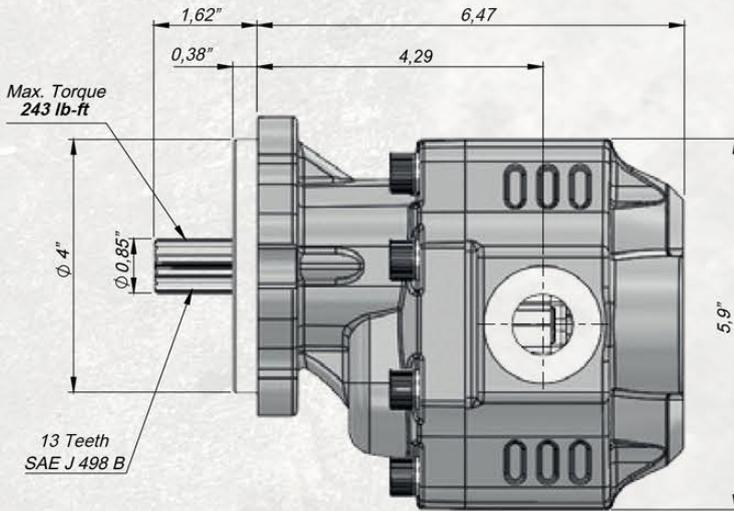


Inlet Pressure	4.35 ÷ 29 PSI		
Operating Viscosity Range	-12:100 cSt		
Fluid Temperature	-40 °F +293 °F		
Working Pressure	Contamination		Filter βx=75
	NAS 1638	ISO 4406	
≥2900 PSI	11	20/17	25 μm
≤2900 PSI	12	21/18	40 μm

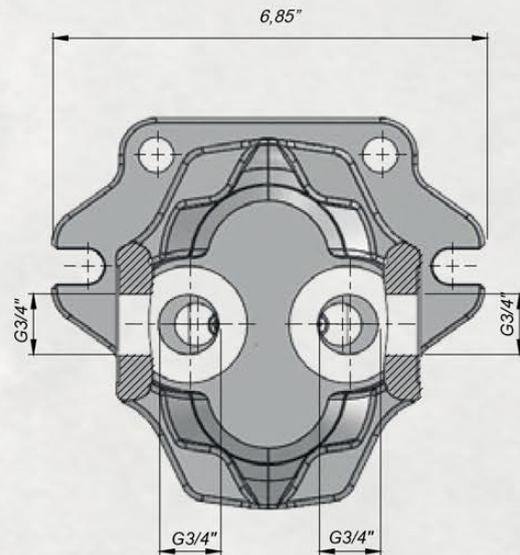
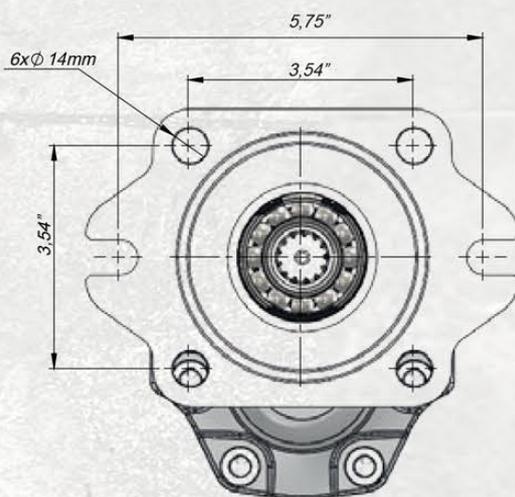


Code BD	Displacement (GPM)	Max. Continuous Pressure (%100)(PSI)	Min. Speed (RPM)	Max. Continuous Speed (RPM)
KH01020340422B-2	9	3771	300	2000

11 GPM Hydraulic Gear Pump

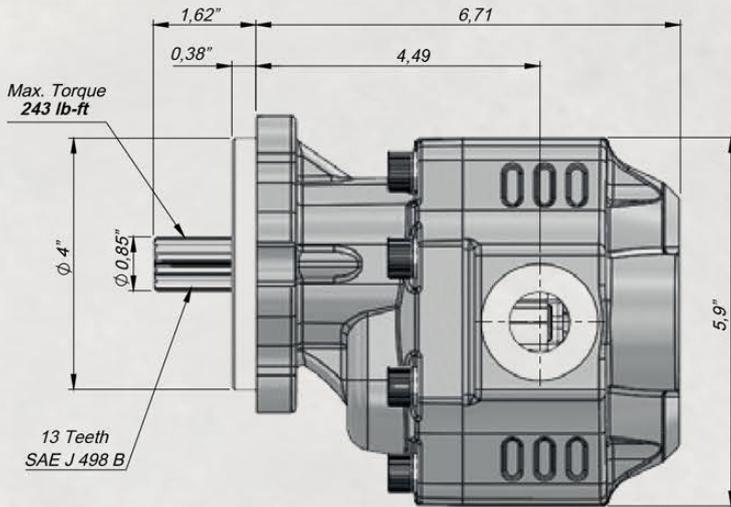


Inlet Pressure		4.35 ÷ 29 PSI	
Operating Viscosity Range		-12:100 cSt	
Fluid Temperature		-40 °F +293 °F	
Working Pressure	Contamination		Filter βx=75
	NAS 1638	ISO 4406	
≥2900 PSI	11	20/17	25 μm
≤2900 PSI	12	21/18	40 μm

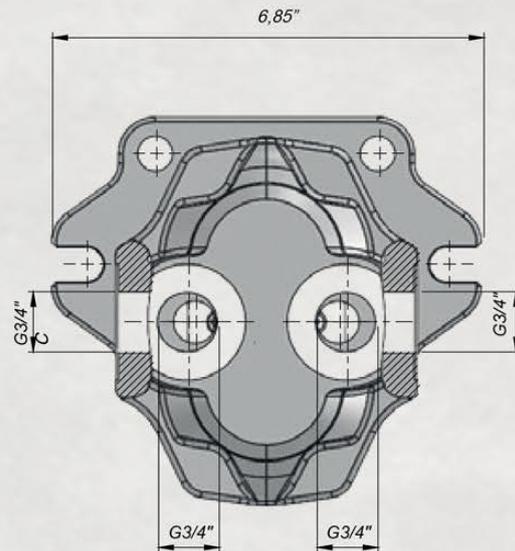
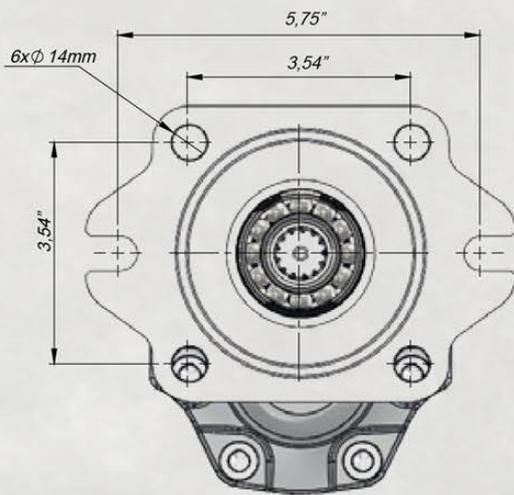


Code BD	Displacement (GPM)	Max. Continuous Pressure (%100)(PSI)	Min. Speed (RPM)	Max. Continuous Speed (RPM)
KH01020430422B-2	11	3626	300	1800

13.5 GPM Hydraulic Gear Pump

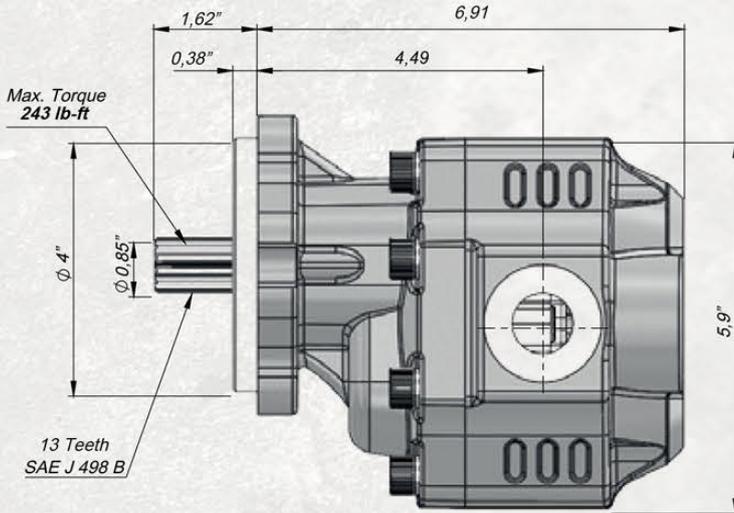


Inlet Pressure		4.35 ÷ 29 PSI	
Operating Viscosity Range		-12:100 cSt	
Fluid Temperature		-40 °F +293 °F	
Working Pressure	Contamination		Filter $\beta_x=75$
	NAS 1638	ISO 4406	
≥ 2900 PSI	11	20/17	25 μm
≤ 2900 PSI	12	21/18	40 μm

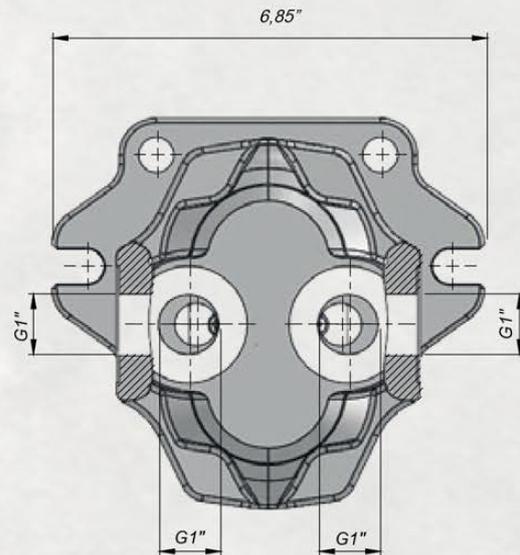
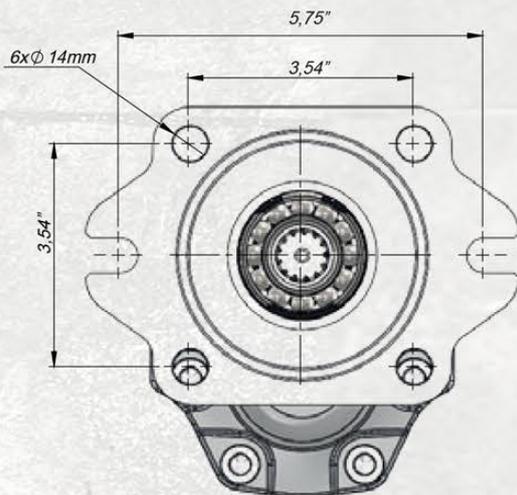


Code BD	Displacement (GPM)	Max. Continuous Pressure (%100)(PSI)	Min. Speed (RPM)	Max. Continuous Speed (RPM)
KH01020510422B-2	13,5	2901	300	1800

16 GPM Hydraulic Gear Pump

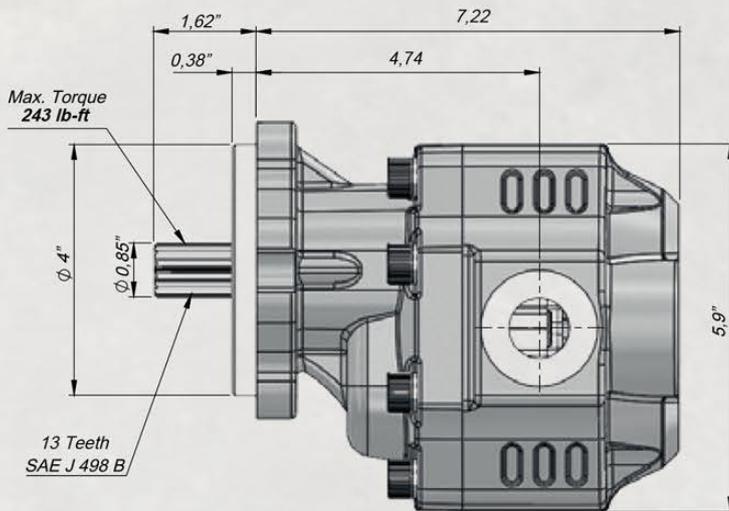


Inlet Pressure	4.35 ÷ 29 PSI		
Operating Viscosity Range	-12:100 cSt		
Fluid Temperature	-40 °F +293 °F		
Working Pressure	Contamination		Filter $\beta_x=75$
	NAS 1638	ISO 4406	
≥ 2900 PSI	11	20/17	25 μ m
≤ 2900 PSI	12	21/18	40 μ m

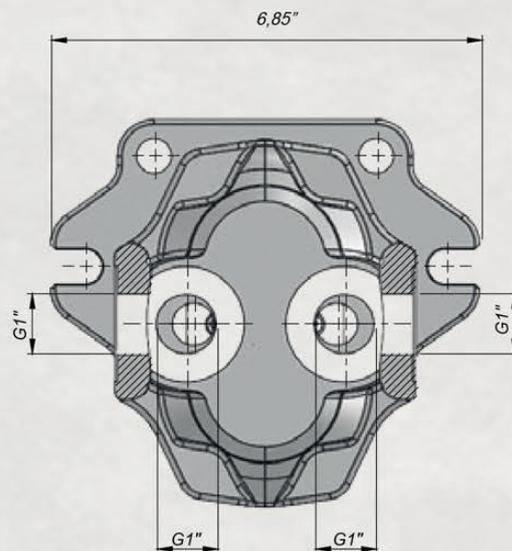
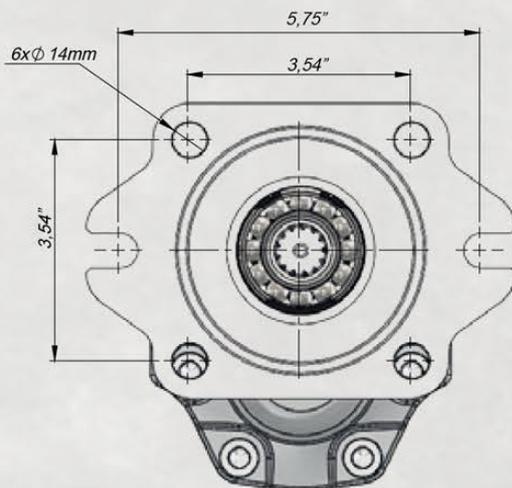


Code BD	Displacement (GPM)	Max. Continuous Pressure (%100)(PSI)	Min. Speed (RPM)	Max. Continuous Speed (RPM)
KH01020610422B-2	16	2828	300	1600

19 GPM Hydraulic Gear Pump

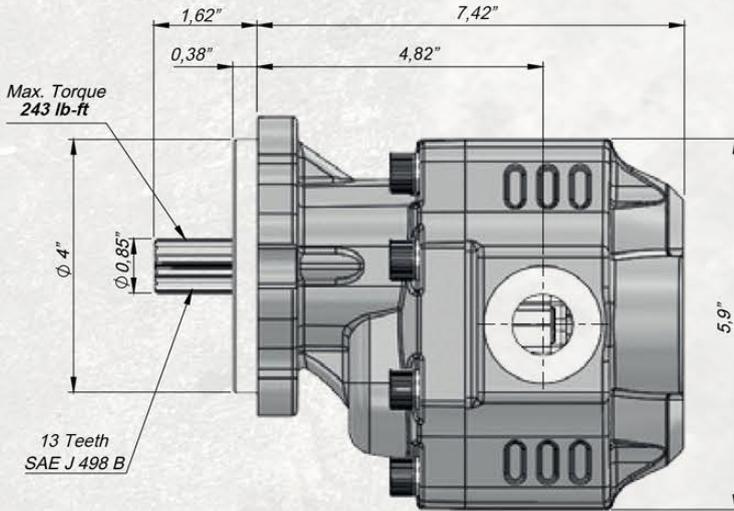


Inlet Pressure	4.35 ÷ 29 PSI		
Operating Viscosity Range	-12:100 cSt		
Fluid Temperature	-40 °F +293 °F		
Working Pressure	Contamination		Filter βx=75
	NAS 1638	ISO 4406	
≥2900 PSI	11	20/17	25 μm
≤2900 PSI	12	21/18	40 μm

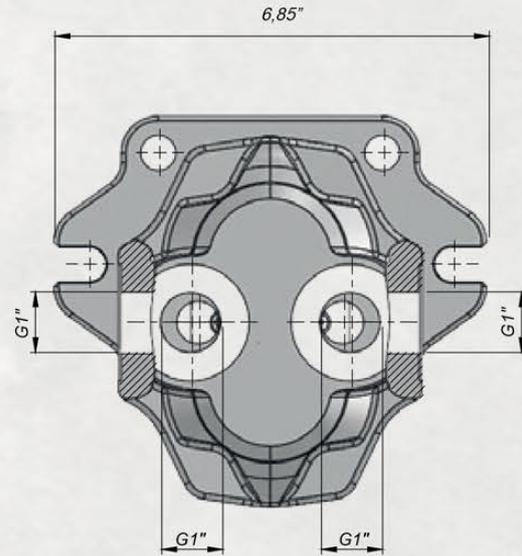
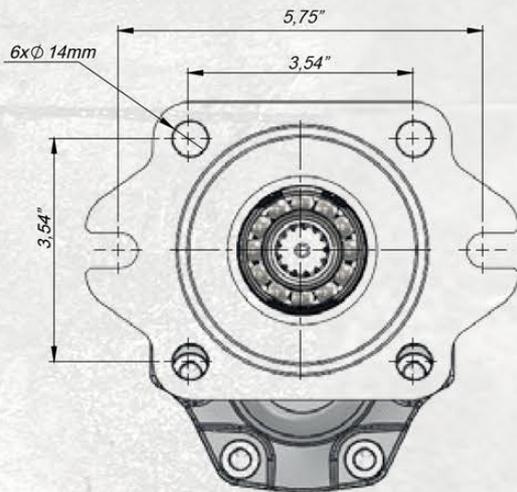


Code BD	Displacement (GPM)	Max. Continuous Pressure (%100)(PSI)	Min. Speed (RPM)	Max. Continuous Speed (RPM)
KH01020730422B-2	19	2756	300	1600

21.5 GPM Hydraulic Gear Pump

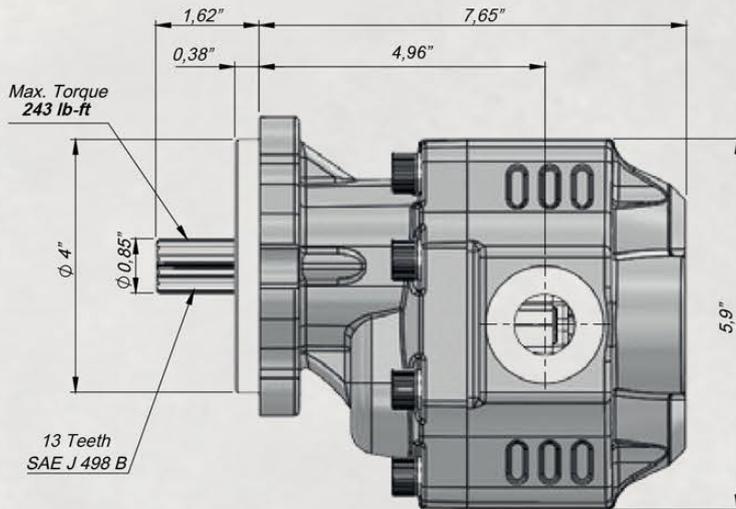


Inlet Pressure		4.35 ÷ 29 PSI	
Operating Viscosity Range		-12:100 cSt	
Fluid Temperature		-40 °F +293 °F	
Working Pressure	Contamination		Filter βx=75
	NAS 1638	ISO 4406	
≥2900 PSI	11	20/17	25 μm
≤2900 PSI	12	21/18	40 μm

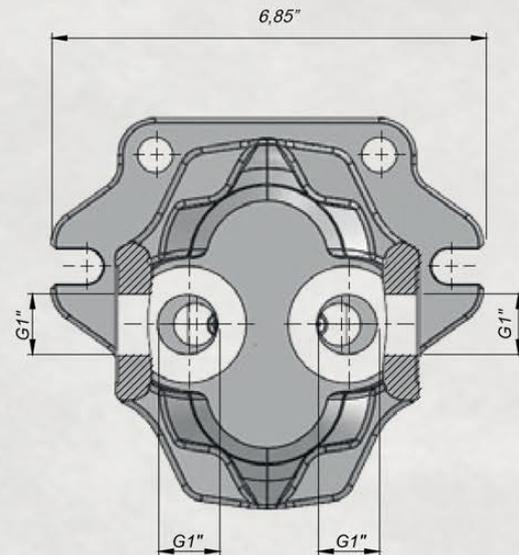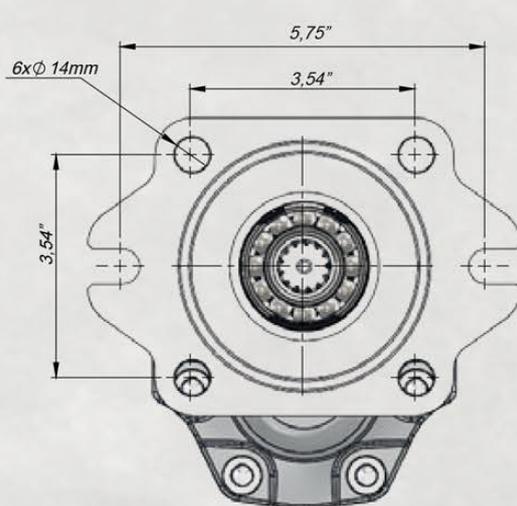

Code BD	Displacement (GPM)	Max. Continuous Pressure (%100)(PSI)	Min. Speed (RPM)	Max. Continuous Speed (RPM)
KH01020820422B-2	21,5	2611	300	1500



HYDRAULIC GEAR PUMP

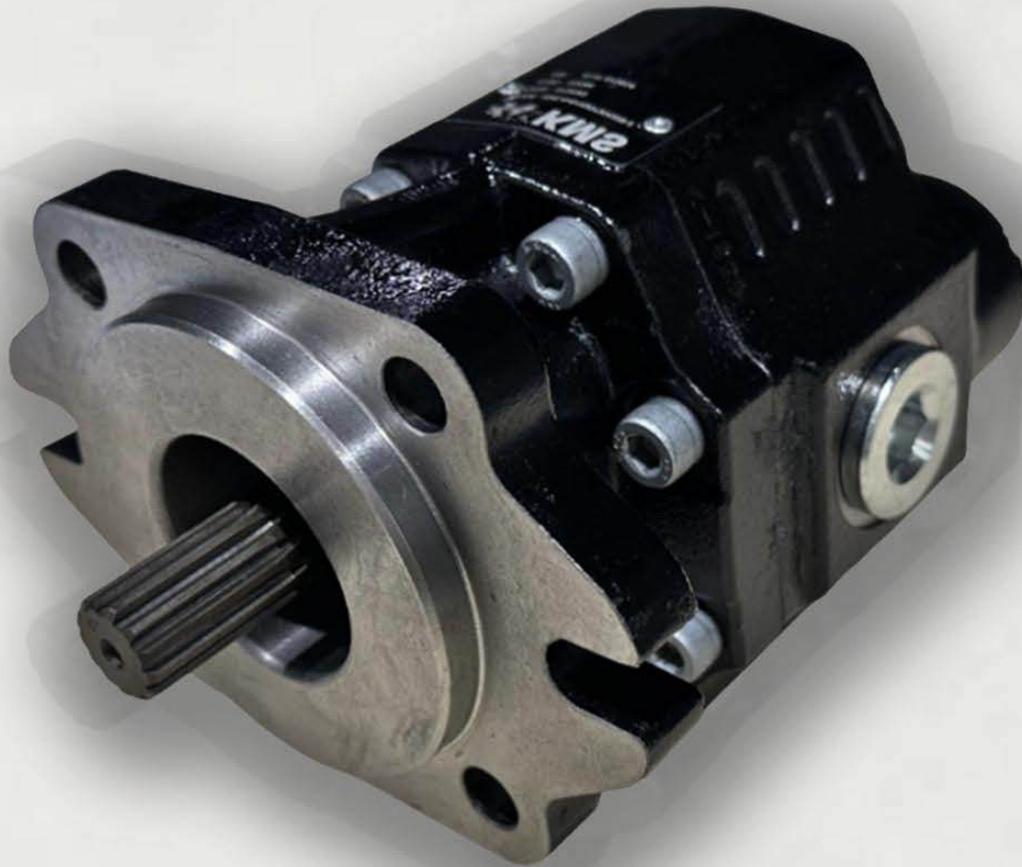

2+4 HOLES SAE B 13 T BI-DIRECTIONAL
4 PORT GEAR PUMP

🌐 www.toracompany.com
✉ sales@toracompany.com
📍 11417 IL 19, Franklin Park, IL 60131
☎ (630) 785-2410
📱 (331) 688-4947



[toracompany](https://www.facebook.com/toracompany)



[tora.company](https://www.instagram.com/tora_company)



www.toracompany.com

